




Key Features

- BELLCORE (Telcordia) GR-1380-CORE Certification
- Specialist Manufacturer with 30 years proven reliability
- Pre-Shrunk heat bonded design for faster installation
- Single fiber entry hole for easier fiber insertion
- UL Approved high quality materials
- Compatible with most fibers, splice trays and ovens
- For Flexible and non-metallic applications

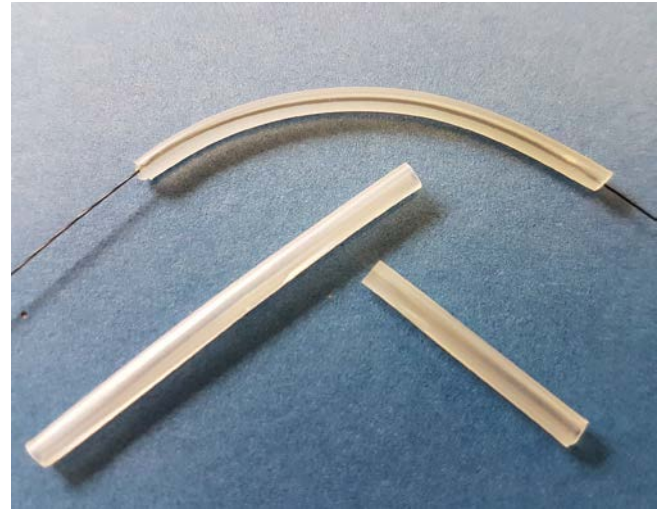

Certifications & regulatory Standard Compliance

Telcordia / Bellcore
GR-1380-CORE
Single fiber range

CERTIFIED
Bellcore Test Conformance Report TCR-8
(Replaces Telcordia TA-NWT-001380)

UL224 Approved

YDPU2.E467437


RoHS Compliant
REACH Compliant
CENELEC Compliant
Conflict-Free Minerals



2011/65/EU
EC 1907/2006
European Standard EN50411-3-3
Dodd Frank Act Section 1502 Compliant



Product Dimensions
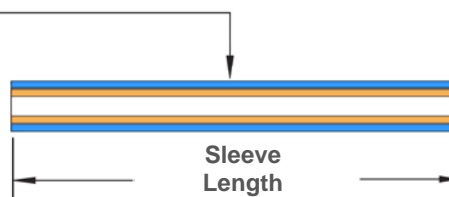
| | |
|---------------------------------|--------------------------------------|
| Sleeve Diameter After Shrinkage | 2.1 mm (0.082 inch) |
| Supplied Internal Diameter | 1.4 mm (0.055 inch) |
| Fiber size | 250-900 µm |



 Heat Shrink Outer Tube
 Adhesive Inner Tube

| Part Number | Sleeve Length | | Inner Length | | Pin Diameter | | Pin Length | |
|-------------|---------------|--------|--------------|--------|--------------|--------|------------|--------|
| | mm | inches | mm | inches | mm | inches | mm | inches |
| PS-3A-X18NP | 18.0 | 0.708 | 18.0 | 0.708 | No Pin | No Pin | No Pin | No Pin |
| PS-3A-X20NP | 20.0 | 0.787 | 20.0 | 0.787 | No Pin | No Pin | No Pin | No Pin |
| PS-3A-X25NP | 25.0 | 0.984 | 25.0 | 0.984 | No Pin | No Pin | No Pin | No Pin |
| PS-3A-X40NP | 40.0 | 1.575 | 40.0 | 1.575 | No Pin | No Pin | No Pin | No Pin |
| PS-3A-X45NP | 45.0 | 1.772 | 45.0 | 1.772 | No Pin | No Pin | No Pin | No Pin |
| PS-3A-XNP | 60.0 | 2.362 | 60.0 | 2.362 | No Pin | No Pin | No Pin | No Pin |

All information is believed to be correct at time of publication and we reserve the right to make changes without prior notice. All dimensions nominal.



FinishAdapt

FIBRE OPTIC SPLICE PROTECTOR SLEEVE SPECIALISTS

3A 'Flexible' Pinless Series

TECHNICAL DATA SHEET

Material Specification

| | |
|-------------------|--|
| Application Type: | Single 250-900µm Fiber |
| Compatibility: | Specialist applications requiring a flexible or non-metallic protection sleeve |
| Outer Material: | Cross-linked Polyolefin heat shrinkable tubing. +135C MIL Spec. UL224 approved |
| Inner Material: | Modified Hot-melt Adhesive Copolymer |
| Colour: | Clear for visual fibre inspection |
| Operating Temp: | -40°C to +70°C |
| Packaging: | Clear Bags of 50. Labelled clear over bag of 1,000 pieces. |



Custom & Stock Product

FinishAdapt manufacture 75+ sizes of single and ribbon fibre splice protector sleeves with 15 million in stock.

We also undertake custom designs and private label packaging to customers requirements.

Please contact us for further information.

sales@finishadapt.com

www.finishadapt.com