FinishAdapt

FIBRE OPTIC SPLICE PROTECTOR SLEEVE SPECIALISTS

Key Features

- BELLCORE (Telcordia) GR-1380 CORE CERTIFICATION
- Specialist Manufacturer with 30 years proven reliability
- Pre-Shrunk heat bonded design for faster installation
- Single fiber entry hole for easier fibre insertion
- 'Flexible' pinless design
- UL Approved high quality materials
- For flexibility, bending and non-metallic applications

Certifications & regulatory Compliance

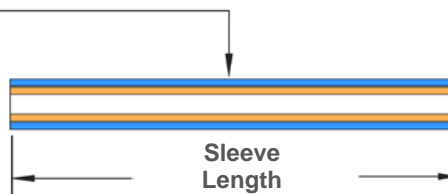|	
Telcordia / Bellcore GR-1380-CORE Single fiber range	**CERTIFIED** Bellcore Test Conformance Report TCR-8 (Replaces Telcordia TA-NWT-001380)
UL224 Approved	**YDPU2.E467437**
RoHS Compliant	**2011/65/EU**
REACH Compliant	**EC 1907/2006**
CENELEC Compliant	European Standard EN50411-3-3
Conflict-Free Minerals	Dodd Frank Act Section 1502 Compliant

Product Dimensions

Sleeve Diameter After Shrinkage	**1.45 mm (0.057 inch)**
Supplied Internal Diameter	**0.35 mm (0.014 inch)**
Fiber size	**250 μm**

- Heat Shrink Outer Tube
- Adhesive Inner Tube

Sleeve Length

Part Number	Sleeve Length		Inner Length		Pin Diameter		Pin Length	
	mm	inches	mm	inches	mm	inches	mm	inches
PS-6A-X25NP	25.0	0.984	25.0	0.984	No Pin	No Pin	No Pin	No Pin
PS-6A-X40NP	40.0	1.575	40.0	1.575	No Pin	No Pin	No Pin	No Pin

All information is believed to be correct at time of publication and we reserve the right to make changes without prior notice. All dimensions nominal.

Material Specification

Application Type:	Single 250µm Fiber
Compatibility:	Specialist applications requiring a flexible or non-metallic protection sleeve
Outer Material:	Cross-linked Polyolefin heat shrinkable tubing. +135C MIL Spec. UL224 approved
Inner Material:	Modified Hot-melt Adhesive Copolymer
Colour:	Clear for visual fibre inspection
Operating Temp:	-40°C to +70°C
Packaging:	Clear Bags of 50. Labelled clear over bag of 1,000 pieces.

Custom & Stock Product

FinishAdapt manufacture 75+ sizes of single and ribbon fibre splice protector sleeves with 15 million in stock.

We also undertake custom designs and private label packaging to customers requirements.

Please contact us for further information.