

FIBRE OPTIC SPLICE PROTECTOR SLEEVE SPECIALISTS

6A 'Flexible' Pinless Micro Series TECHNICAL DATA SHEET

Single 250µm fiber. 1.1mm diameter

Key Features

- BELLCORE (Telcordia) GR-1380-CORE Certification
- Specialist Manufacturer with 30+ years proven reliability
- Pre-Shrunk heat bonded design for faster installation
- Single fiber entry hole for easier fiber insertion
- UL Approved high quality materials
- . Compatible with most fibers, splice trays and ovens
- For Flexible and non-metallic applications



Certifications & regulatory Standard Compliance

Telcordia / Bellcore GR-1380-CORE Single fiber range CERTIFIED

Bellcore Test Conformance Report TCR-8
(Replaces Telcordia TA-NWT-001380)

UL224 Approved

YDPU2.E467437

RoHS Compliant
REACH Compliant


2011/65/EU EC 1907/2006

CENELEC Compliant European Standard EN50411-3-3
Conflict-Free Minerals Dodd Frank Act Section 1502 Compliant





Product Dimensions

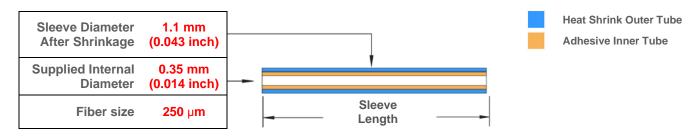

	Sleeve Length		Inner Length		Pin Diameter		Pin Length	
Part Number	mm	inches	mm	inches	mm	inches	mm	inches
PS-6A-X15UNP	15.0	0.591	15.0	0.591	No Pin	No Pin	No Pin	No Pin
PS-6A-X25UNP	25.0	0.984	25.0	0.984	No Pin	No Pin	No Pin	No Pin

All information is believed to be correct at time of publication and we reserve the right to make changes without prior notice. All dimensions nominal.



6A 'Flexible' Pinless Micro Series TECHNICAL DATA SHEET

Material Specification

Application Type: Single 250µm Fiber

Compatibility: Specialist applications requiring a flexible or non-metallic protection sleeve

Outer Material: Cross-linked Polyolefin heat shrinkable tubing. +135C MIL Spec. UL224 approved

Inner Material: Modified Hot-melt Adhesive Copolymer

Colour: Clear for visual fibre inspection

Operating Temp: -40°C to +70°C

Packaging: Clear Bags of 50. Labelled clear over bag of 1,000 pieces.



Custom & Stock Product

FinishAdapt manufacture 75+ sizes of single and ribbon fibre splice protector sleeves with 15 million in stock.

We also undertake custom designs and private label packaging to customers requirements.

Please contact us for further information.