


Fibre Optic Splice Protection Sleeve Specialists

8 Fibre Ribbon Sleeve Technical Data Sheet

Key Features

- 8 Fibre Ribbon Sleeve
- Pre-Shrunk heat bonded design for faster installation
- Single fiber entry hole for easier ribbon fiber insertion
- Heat bonded white Ceramic reinforcing pin
- UL Approved high quality materials
- Mass Ribbon series are held in stock

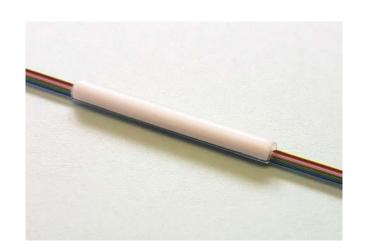

Certifications & Regulatory Standard Compliance

Telcordia / Bellcore GR-1380-CORE **CERTIFIED-Single Fiber Range**Bellcore Test Conformance Report TCR-8
(Replaces Telcordia TA-NWT-001380)

UL224 Approved YDPU2.E467437

RoHS Compliant REACH Compliant

2011/65/EU EC 1907/2006


CENELEC Compliant Conflict-Free Minerals European Standard EN50411-3-3
Dodd Frank Act Section 1502 Compliant







Product Dimensions

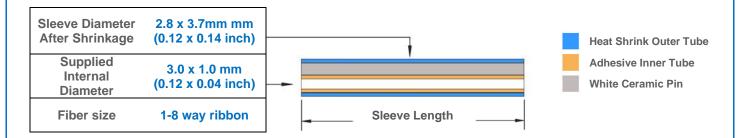

	Sleeve Length		Inner Length		Pin Diameter		Pin Length	
Part Number	mm	inches	mm	inches	mm	inches	mm	inches
PS-94-X30C	30.0	1.181	30.0	1.181	2.85 x 1.5	0.11 x 0.059	30.0	1.181

All information is believed to be correct at time of publication and we reserve the right to make changes without prior notice. All dimensions nominal.



8 Fibre Ribbon Sleeve Technical Data Sheet

Material Specification

Application Type: Mass Ribbon Multifibre

Compatibility: Most ribbon splice trays, ovens and coated fibers

Outer Material: Cross-linked Polyolefin Heat Shrinkable Tubing +135°C MIL Spec.

UL224 Approved YDPU2.E467437 & SAE-AMS-DTL-23053/5 Class 2

Inner Material: Hot-melt adhesive Copolymer

Reinforcing Pin: White Ceramic

Colours: Clear for easy visual inspection

Splice Operating

Temperature:

-40°C to +70°C (Heat shrink outer rated at -55°C to +135°C)*

Storage

Temperature:

-40°C to +70°C

Package Quantity: Bags of 50 and 100. Labelled over bag of 1,000



Custom Designs

Finishadapt manufacture a comprehensive range of Single and Mass Ribbon sleeves that are available from stock.

We also design and manufacture splice protector sleeves to customers' requirements and own brand label for leading manufacturers and distributors. Please contact us now for further details.