




FinishAdapt

Fiber Optic

Splice Protector Sleeves

2024 Product Range

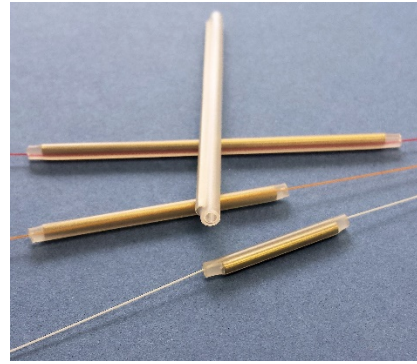

Part Number	Fiber Size	Nominal Product Dimensions mm			Strength Member mm		
		Recovered Diameter	Product Length	Supplied Bore id	Pin Diameter	Pin Length	Pin Material
SINGLE FIBER - MICRO SLEEVES							
PS-6A-X10U	250µm	1.3	10	0.35	0.5	10	Stainless Steel
PS-6A-X12U	250µm	1.3	12	0.35	0.5	12	Stainless Steel
PS-6A-X15U	250µm	1.3	15	0.35	0.5	15	Stainless Steel
PS-6A-X20U	250µm	1.3	20	0.35	0.5	20	Stainless Steel
PS-6A-X25U	250µm	1.3	25	0.35	0.5	25	Stainless Steel
PS-6A-X30U	250µm	1.3	30	0.35	0.5	30	Stainless Steel
PS-6A-X40U	250µm	1.3	40	0.35	0.5	40	Stainless Steel
PS-SP-059 (CRIMP Sleeve)*	250µm	1.26	30	0.35	0.5	30	Stainless Steel
SINGLE FIBER - MINI SLEEVES							
PS-6A-X25PS	250µm	1.6	25	0.35	0.8	25	Stainless Steel
PS-6A-X30PS	250µm	1.6	30	0.35	0.8	30	Stainless Steel
PS-6A-X40PS	250µm	1.6	40	0.35	0.8	40	Stainless Steel
SINGLE FIBER - MIDI SLEEVES							
PS-6A-X15M	250-900 µm	1.9	15	1.2	0.5	15	Stainless Steel
PS-6A-X25M	250-900 µm	1.9	25	1.2	0.5	25	Stainless Steel
PS-6A-X30M	250-900 µm	1.9	30	1.2	0.5	30	Stainless Steel
PS-6A-X40M	250-900 µm	1.9	40	1.2	0.5	40	Stainless Steel
SINGLE FIBER - 5A SLEEVES							
PS-5A-X35	250-900 µm	2.1	35	1.2	0.8	31	Stainless Steel
PS-5A-X45	250-900 µm	2.1	45	1.2	0.8	40	Stainless Steel
PS-5A-X	250-900 µm	2.1	61	1.2	0.8	57	Stainless Steel
PS-5A-X45/Y (Yellow tint)	250-900 µm	2.1	45	1.2	0.8	40	Stainless Steel
SINGLE FIBER - 3A STANDARD SLEEVES - CLEAR & 10 COLOURS							
PS-3A-X22	250-900 µm	2.4	22	1.4	1.0	18	Stainless Steel
PS-3A-X25	250-900 µm	2.4	25	1.4	1.0	21	Stainless Steel
PS-3A-X30	250-900 µm	2.4	30	1.4	1.0	27	Stainless Steel
PS-3A-X35	250-900 µm	2.4	35	1.4	1.0	31	Stainless Steel
PS-3A-X40	250-900 µm	2.4	40	1.4	1.0	36	Stainless Steel
PS-3A-X45	250-900 µm	2.4	45	1.4	1.0	41	Stainless Steel
PS-3A-X50	250-900 µm	2.4	50	1.4	1.0	46	Stainless Steel
PS-3A-X	250-900 µm	2.4	61	1.4	1.0	57	Stainless Steel

*Alternative fusion sleeve for ANT CRIMP Sleeves

Our most popular products are shown in Red

www.finishadapt.com

sales@finishadapt.com



FinishAdapt



Fiber Optic


Splice Protector Sleeves

2024 Product Range

Part Number	Fiber Size	Nominal Product Dimensions mm			Strength Member mm		
		Recovered Diameter	Product Length	Supplied Bore id	Pin Diameter	Pin Length	Pin Material
SINGLE FIBER - US STANDARD SLEEVES							
PS-3A-X23/US	250-900 μm	2.6	23	1.4	1.4	19	Stainless Steel
PS-3A-X40/US	250-900 μm	2.6	40	1.4	1.4	36	Stainless Steel
PS-3A-X45/US	250-900 μm	2.6	45	1.4	1.4	41	Stainless Steel
PS-3A-X/US	250-900 μm	2.6	61	1.4	1.4	57	Stainless Steel
SINGLE FIBER – US LARGE SLEEVES							
PS-3A-X40/USL	250-900 μm	2.9	40	1.4	1.5	36	Stainless Steel
PS-3A-X45/USL	250-900 μm	2.9	45	1.4	1.5	40	Stainless Steel
PS-3A-X/USL	250-900 μm	2.9	61	1.4	1.5	55	Stainless Steel
SINGLE FIBER LARGE SLEEVES							
PS-1A-X40S	250-900 μm	3.0	40	1.9	1.4	36	Stainless Steel
PS-1A-X40	250-900 μm	3.2	40	1.9	1.6	36	Stainless Steel
PS-1A-X45	250-900 μm	3.2	45	1.9	1.6	41	Stainless Steel
PS-1A-X	250-900 μm	3.2	61	1.9	1.6	57	Stainless Steel
SINGLE FIBER - EXTRA LARGE SLEEVES							
PS-2A-X	250-900 μm	3.7	68	1.9	1.6	57	Stainless Steel
RIBBON SLEEVES							
1-8 FIBER RIBBON SLEEVE SERIES – MULTIPLE (MASS) FIBER:							
PS-94-X30C	1-8 Ribbon	2.8-3.7	30	3.0 x 1.0	3.0 x 1.0	30	White Ceramic
1-12 FIBER RIBBON SLEEVE SERIES – MULTIPLE (MASS) FIBER:							
PS-99-X25C	1-12 Ribbon	3.75-4.75	25	3.5 x 1.0	3.9 x 1.85	25	White Ceramic
PS-99-X30C	1-12 Ribbon	3.75-4.75	30	3.5 x 1.0	3.9 x 1.85	30	White Ceramic
PS-99-X40C	1-12 Ribbon	3.75-4.75	40	3.5 x 1.0	3.9 x 1.85	40	White Ceramic
NEW! SMALL SIZE 12 FIBER RIBBON SLEEVE – for MULTIPLE (MASS) FIBER:							
PS-70-X25SE	1-12 Ribbon	< 2.00 mm	25	3.5 x 1.0	3.28 x 0.29	25	Double Steel Sheets
DIELECTRIC SLEEVES							
NON METALLIC PIN – SINGLE FIBER							
PS-3D-X30	250-900 μm	2.4	30	1.4	1.0	27	FRP Rod
PS-3D-X40	250-900 μm	2.4	40	1.4	1.0	36	FRP Rod
PS-3D-X45	250-900 μm	2.4	45	1.4	1.0	41	FRP Rod
PS-3D-X	250-900 μm	2.4	61	1.4	1.0	57	FRP Rod



FinishAdapt

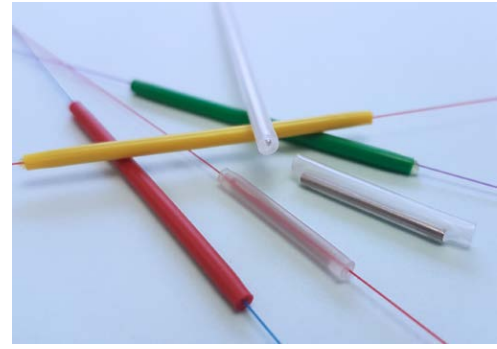

Fiber Optic

Splice Protector Sleeves

2024 Product Range

FLEXIBLE / PINLESS SLEEVES

FLEXIBLE 6A MICRO / MINI SLEEVE SERIES – SINGLE FIBER

PS-6A-X15UNP	250µm	1.1	15	0.35	No Strength Member
PS-6A-X25UNP	250µm	1.1	25	0.35	No Strength Member
PS-6A-X40NP	250µm	1.45	40	0.35	No Strength Member
PS-SP-154	250-400µm	1.45	30	0.60	No Strength Member

FLEXIBLE 3A STANDARD SLEEVE SERIES – SINGLE FIBER

PS-3A-X18NP	250-900 µm	2.1	18	1.4	No Strength Member
PS-3A-X20NP	250-900 µm	2.1	20	1.4	No Strength Member
PS-3A-X25NP	250-900 µm	2.1	25	1.4	No Strength Member
PS-3A-X40NP	250-900 µm	2.1	40	1.4	No Strength Member
PS-3A-X45NP	250-900 µm	2.1	45	1.4	No Strength Member
PS-3A-XNP	250-900 µm	2.1	61	1.4	No Strength Member
PS-3A-X90NP	250-900 µm	2.1	90	1.4	No Strength Member

COLOURED - SINGLE FIBER - 3A STANDARD SLEEVES

Part Number	Colour	Fiber Size	Nominal Product Dimensions mm			Strength Member mm		
			Recovered Diameter	Product Length	Supplied Bore id	Pin Diameter	Pin Length	Pin Material
COLOURED SPLICE SLEEVES – 3A Series 61mm Long								
PS-3A-0	Black	250-900 µm	2.4	61	1.4	1.0	57	Stainless Steel
PS-3A-1	Brown	250-900 µm	2.4	61	1.4	1.0	57	Stainless Steel
PS-3A-2	Red	250-900 µm	2.4	61	1.4	1.0	57	Stainless Steel
PS-3A-3	Orange	250-900 µm	2.4	61	1.4	1.0	57	Stainless Steel
PS-3A-4	Yellow	250-900 µm	2.4	61	1.4	1.0	57	Stainless Steel
PS-3A-5	Green	250-900 µm	2.4	61	1.4	1.0	57	Stainless Steel
PS-3A-6	Blue	250-900 µm	2.4	61	1.4	1.0	57	Stainless Steel
PS-3A-7	Violet	250-900 µm	2.4	61	1.4	1.0	57	Stainless Steel
PS-3A-8	Grey	250-900 µm	2.4	61	1.4	1.0	57	Stainless Steel
PS-3A-9	White	250-900 µm	2.4	61	1.4	1.0	57	Stainless Steel
COLOURED SPLICE SLEEVES – 3A Series 45mm Long								
PS-3A-0/45	Black	250-900 µm	2.4	45	1.4	1.0	41	Stainless Steel
PS-3A-1/45	Brown	250-900 µm	2.4	45	1.4	1.0	41	Stainless Steel
PS-3A-2/45	Red	250-900 µm	2.4	45	1.4	1.0	41	Stainless Steel
PS-3A-3/45	Orange	250-900 µm	2.4	45	1.4	1.0	41	Stainless Steel
PS-3A-4/45	Yellow	250-900 µm	2.4	45	1.4	1.0	41	Stainless Steel
PS-3A-5/45	Green	250-900 µm	2.4	45	1.4	1.0	41	Stainless Steel
PS-3A-6/45	Blue	250-900 µm	2.4	45	1.4	1.0	41	Stainless Steel
PS-3A-7/45	Violet	250-900 µm	2.4	45	1.4	1.0	41	Stainless Steel
PS-3A-8/45	Grey	250-900 µm	2.4	45	1.4	1.0	41	Stainless Steel
PS-3A-9/45	White	250-900 µm	2.4	45	1.4	1.0	41	Stainless Steel



FinishAdapt

Fiber Optic

Splice Protector Sleeves

2024 Product Range



NEW! CRIMP SLEEVES

PCS-A30 (150)	Mechanical crimp protection sleeve (ANT). For 250um fiber. Aluminium body / adhesive inner. 30mm long. Supplied in a box of 150 pieces.
PCS-A30-TOOL	Crimp tool – for fast and easy installation.
PS-SP-059	Fusion Splice Sleeve alternative to Crimp Sleeves. With special reduced diameter x 30mm long.

CUSTOM MANUFACTURED PRODUCTS

Custom Products	At our UK based R&D facility we can design, develop and prototype special sizes and types of splice protector sleeves for customers' special applications.
Custom Colours	We can manufacture splice sleeves that are colour matched to samples or to specified RAL numbers.
Custom Labels / Kits	We confidentially produce customised kits and 'own label' packaging for many leading OEMs and distributors.

STOCK AVAILABILITY

15+ Million in stock across the range providing fast global delivery.



www.finishadapt.com

sales@finishadapt.com



Quality, Reliability, Expertise and Trust

FinishAdapt are the leading Manufacturers of Premium Quality fibre optic fusion Splice Protector Sleeves. Our primary focus is on high levels of product quality, speed of installation and the long-term reliability essential for FTTx installations and photonics applications.

Celebrating 30+ years of Manufacturing Expertise

During 2023 we celebrated **30 years** that Finishadapt have specialised solely in the design and manufacture of fusion splice sleeves. We originally developed the product with Bellcore / British Telecom and are joint authors of the CENELEC splice sleeve European standard. Providing our customers with extensive product knowledge and technical support.

Trusted, Certified and Approved

We are proud to hold **Telcordia / Bellcore GR-1380-CORE Certification**, while most suppliers can only claim compliance to this industry standard. This ensures Finishadapt product meets strict design specifications and are fully tested and certified. Bellcore Test Conformance Report TCR-08 applies.

Our products are manufactured using UL approved materials to UL224. UL Certification YDPU2.E467437 applies. All products are fully RoHS and REACH compliant and Conflict-Free. Providing our customers with the reassurance that Finishadapt products are the highest quality with proven long-term reliability and environmental compliance.

Unique 'Pre-Shrunk' Design for Fast Installation

Finishadapt products incorporate our **Superior 'Pre-shrunk' splice sleeve design**. This ensures all components are securely held together with a single fiber aperture. This provides for easier fiber insertion and faster installation times.

Largest Size Range and Customised Solutions

We offer the most comprehensive range on the market with **75+ different Splice Sleeve products**. Including Micro, Mini, Midi 6A, 3A, 5A, US, Dielectric, Flexible and Ribbon Sleeves. This provides our customers with the greatest choice and products available for all applications.

We sell to many leading OEMs and global Distributors with our standard ranges and provide many with **Own Brand Label solutions**.

We also help customers in developing, proto-typing and manufacturing **Custom Designed products for specialist applications**.

Fast Global Delivery from Huge Stocks

We hold over **15 Million splice sleeves in stock**. This enables us to provide the widest product choice, instant availability and fast global deliveries. With our reputation for providing outstanding customer service.